





TITUS

U1 Medical Series



| Specifications | |
|--|----------------------|
| Battery Pack Configuration | 4s-16p/14p/12p |
| Battery Fuel Gauge | Texas Instruments |
| Battery Protect IC | Texas Instruments |
| Microprocessor | Texas Instruments |
| Communication | SMBus 1.1 / BLE |
| Pack Voltage | 12.8V |
| Pack Capacity – Ah | 51.2Ah/44.8Ah/38.4Ah |
| Pack Capacity – Wh | 665Wh/573Wh/491Wh |
| Discharge Current – Maximum Continuous | 20A |
| Charger | System |
| Charging Voltage | 14.6V |
| Charging Current | 20A Max. |
| Float Voltage | 13.8V |
| Temperature Range Charge | 0°C to +60°C |
| Temperature Range Discharge | 0°C to +60°C |
| Discharge Cutoff Voltage | 11.0V |

Mechanical Drawings

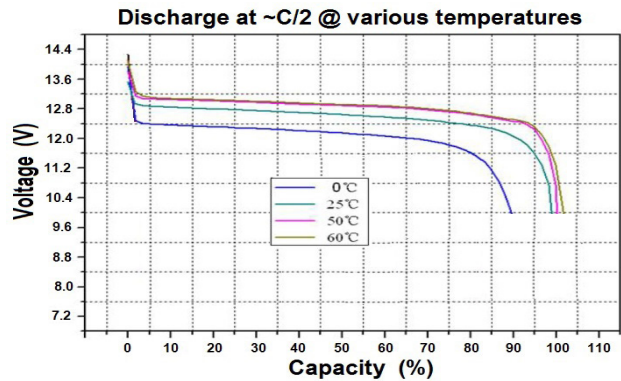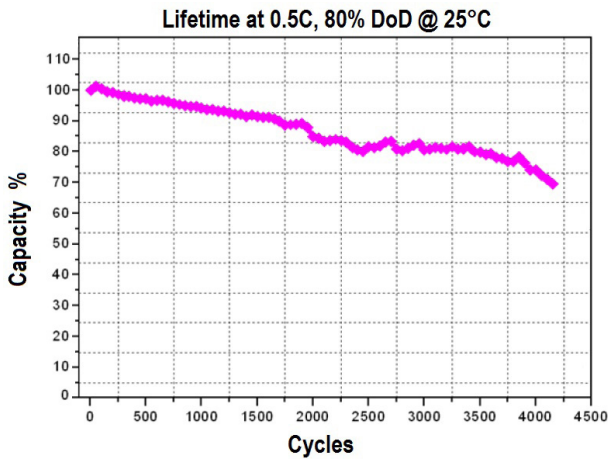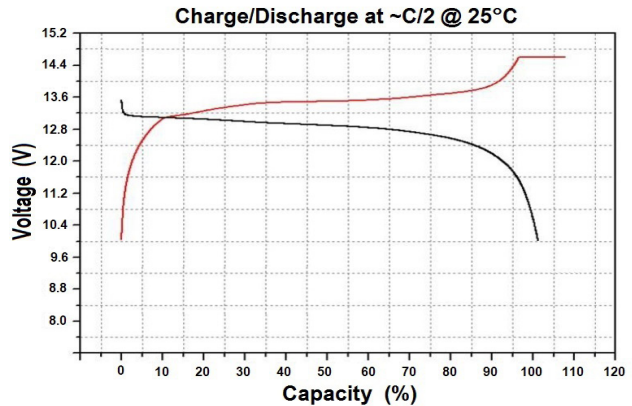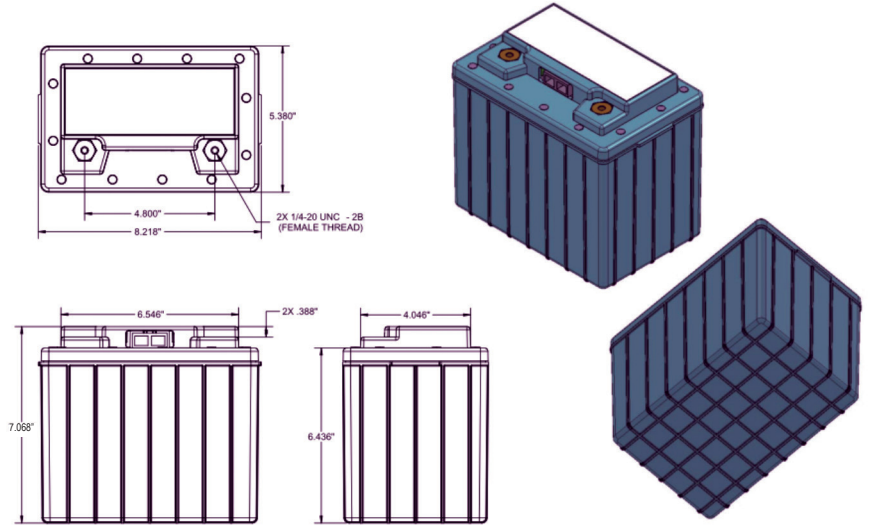

DEVON COMPANY
 680 Main St - Suite 206
 Watertown, CT 06795
 Tel: 860.945.1177

www.devon-company.com