

TITUS™ ER14335M

Spiral Construction Size 2/3 AA

Scope:

This data sheet describes the mechanical design and electrical performance of the TITUS™ ER14335M, 2/3 AA-size, 3.6V, 1.2Ah, Primary Lithium Thionyl chloride (SOCl₂), HIGH POWER battery.

Mechanical / Physical Characteristics:





- Length
- Diameter
- Weight
- Lithium weight

1.32" max (33.5mm)
0.57" max (14.5mm)
14g max
~0.4g

Electrical Characteristics:

- Nominal voltage
- Nominal capacity
- Maximum continuous discharge current
- Maximum pulse current
- Operating temperature

3.6V
1.2Ah
300mA
500mA
-55°C to +85°C

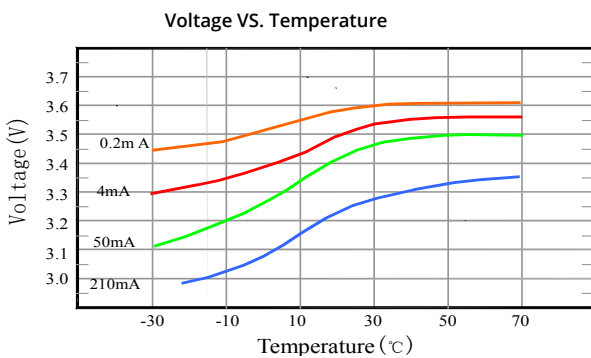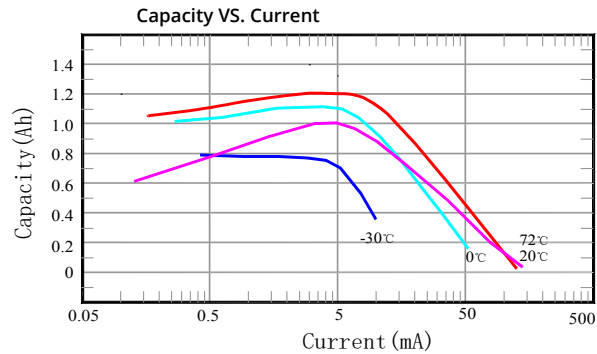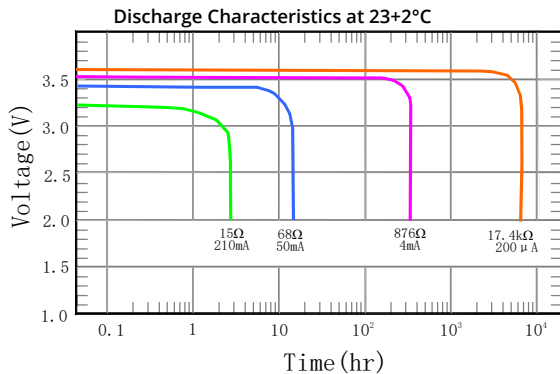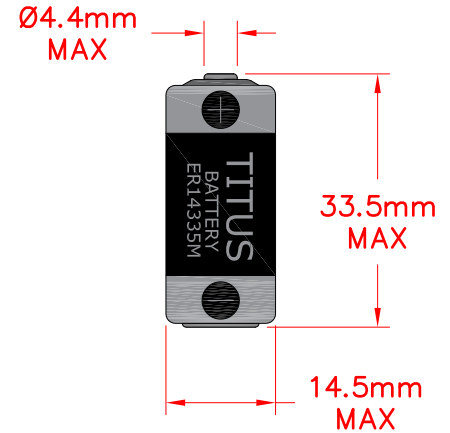

WARNING: Fire, explosion, and severe burn hazards.

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water

Available Terminations:

S-Standard Termination T-Solder Tabs P-Axial Pins
Special terminations available upon request

Devon Company
680 Main St- Suite 206
Watertown, CT 06795
Tel: 8609451177
Email: info@devon-company.com
www.devon-company.com