

Scope:


This data sheet describes the mechanical design and electrical performance of the TITUS™ ER18505, fat A-size, 3.6V, 4.0Ah, Primary Lithium Thionyl chloride (SOCl₂), HIGH ENERGY battery.

Mechanical / Physical Characteristics:

- Length 1.99" max (50.5mm)
- Diameter 0.73" max (18.5mm)
- Weight 28g max
- Lithium weight ~1.2g


Electrical Characteristics:

- Nominal voltage 3.6V
- Nominal capacity 4.0Ah
- Maximum continuous discharge current 120mA
- Maximum pulse current 200mA
- Operating temperature -55°C to +85°C

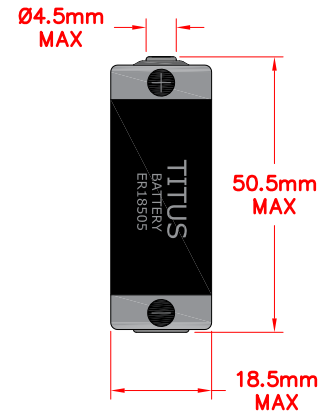


Standard Termination


Discharge Characteristics at 23±2°C

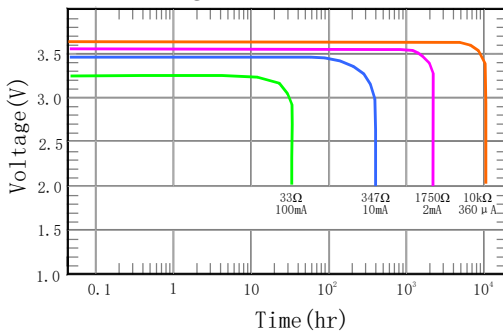

Capacity VS. Current

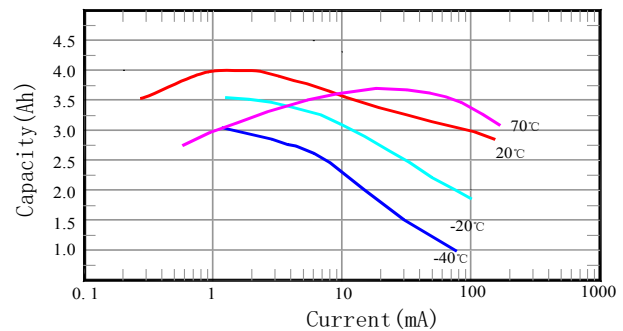

Voltage VS. Temperature

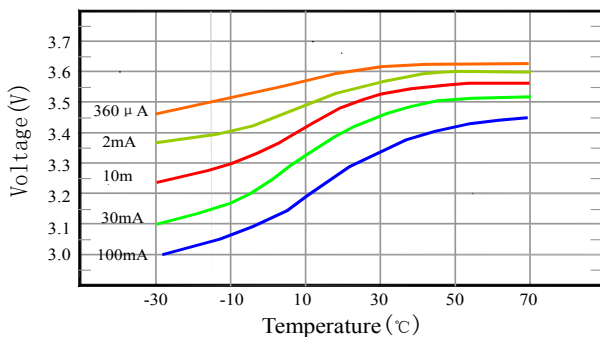

WARNING: Fire, explosion, and severe burn hazards.

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water

Available Terminations:

S-Standard Termination T-Solder Tabs P-Axial Pins
Special terminations available upon request

Devon Company

680 Main St- Suite 206
Watertown, CT 06795
Tel: 8609451177

Email: info@devon-company.com
www.devon-company.com