

### Scope:


This data sheet describes the mechanical design and electrical performance of the TITUS™ ER34615, D-size, 3.6V, 19.0Ah, Primary Lithium Thionyl chloride (SOCl<sub>2</sub>), HIGH ENERGY battery.

### Mechanical / Physical Characteristics:

- Length 2.42" max (61.5mm)
- Diameter 1.30" max (32.9mm)
- Weight 105g max
- Lithium weight ~4.9g


### Electrical Characteristics:

- Nominal voltage 3.6V
- Nominal capacity 19.0Ah
- Maximum continuous discharge current 230mA
- Maximum pulse current 400mA
- Operating temperature -55°C to +85°C

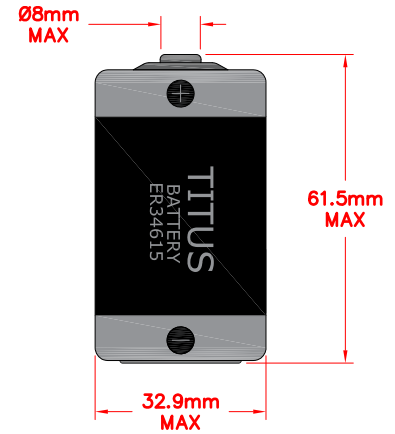


Standard Termination


Discharge Characteristics at 23±2°C

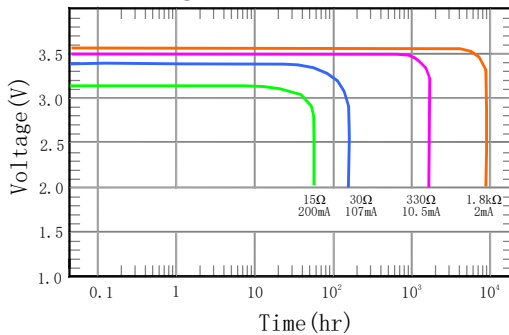

Capacity VS. Current

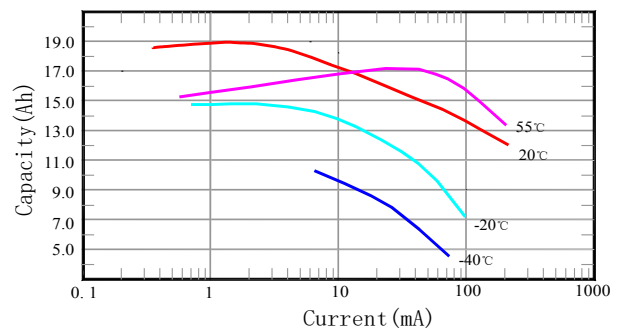

Voltage VS. Temperature

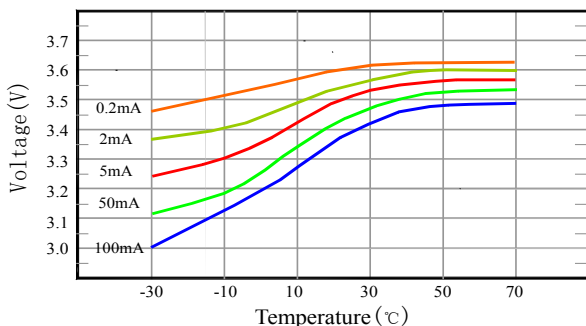

**WARNING: Fire, explosion, and severe burn hazards.**

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water

### Available Terminations:

S-Standard Termination T-Solder Tabs P-Axial Pins  
Special terminations available upon request

### Devon Company

680 Main St- Suite 206

Watertown, CT 06795

Tel: 8609451177

Email: [info@devon-company.com](mailto:info@devon-company.com)

[www.devon-company.com](http://www.devon-company.com)